




HARDWOOD SYSTEMS

DURACUSHION I™

FLOATING SYSTEM

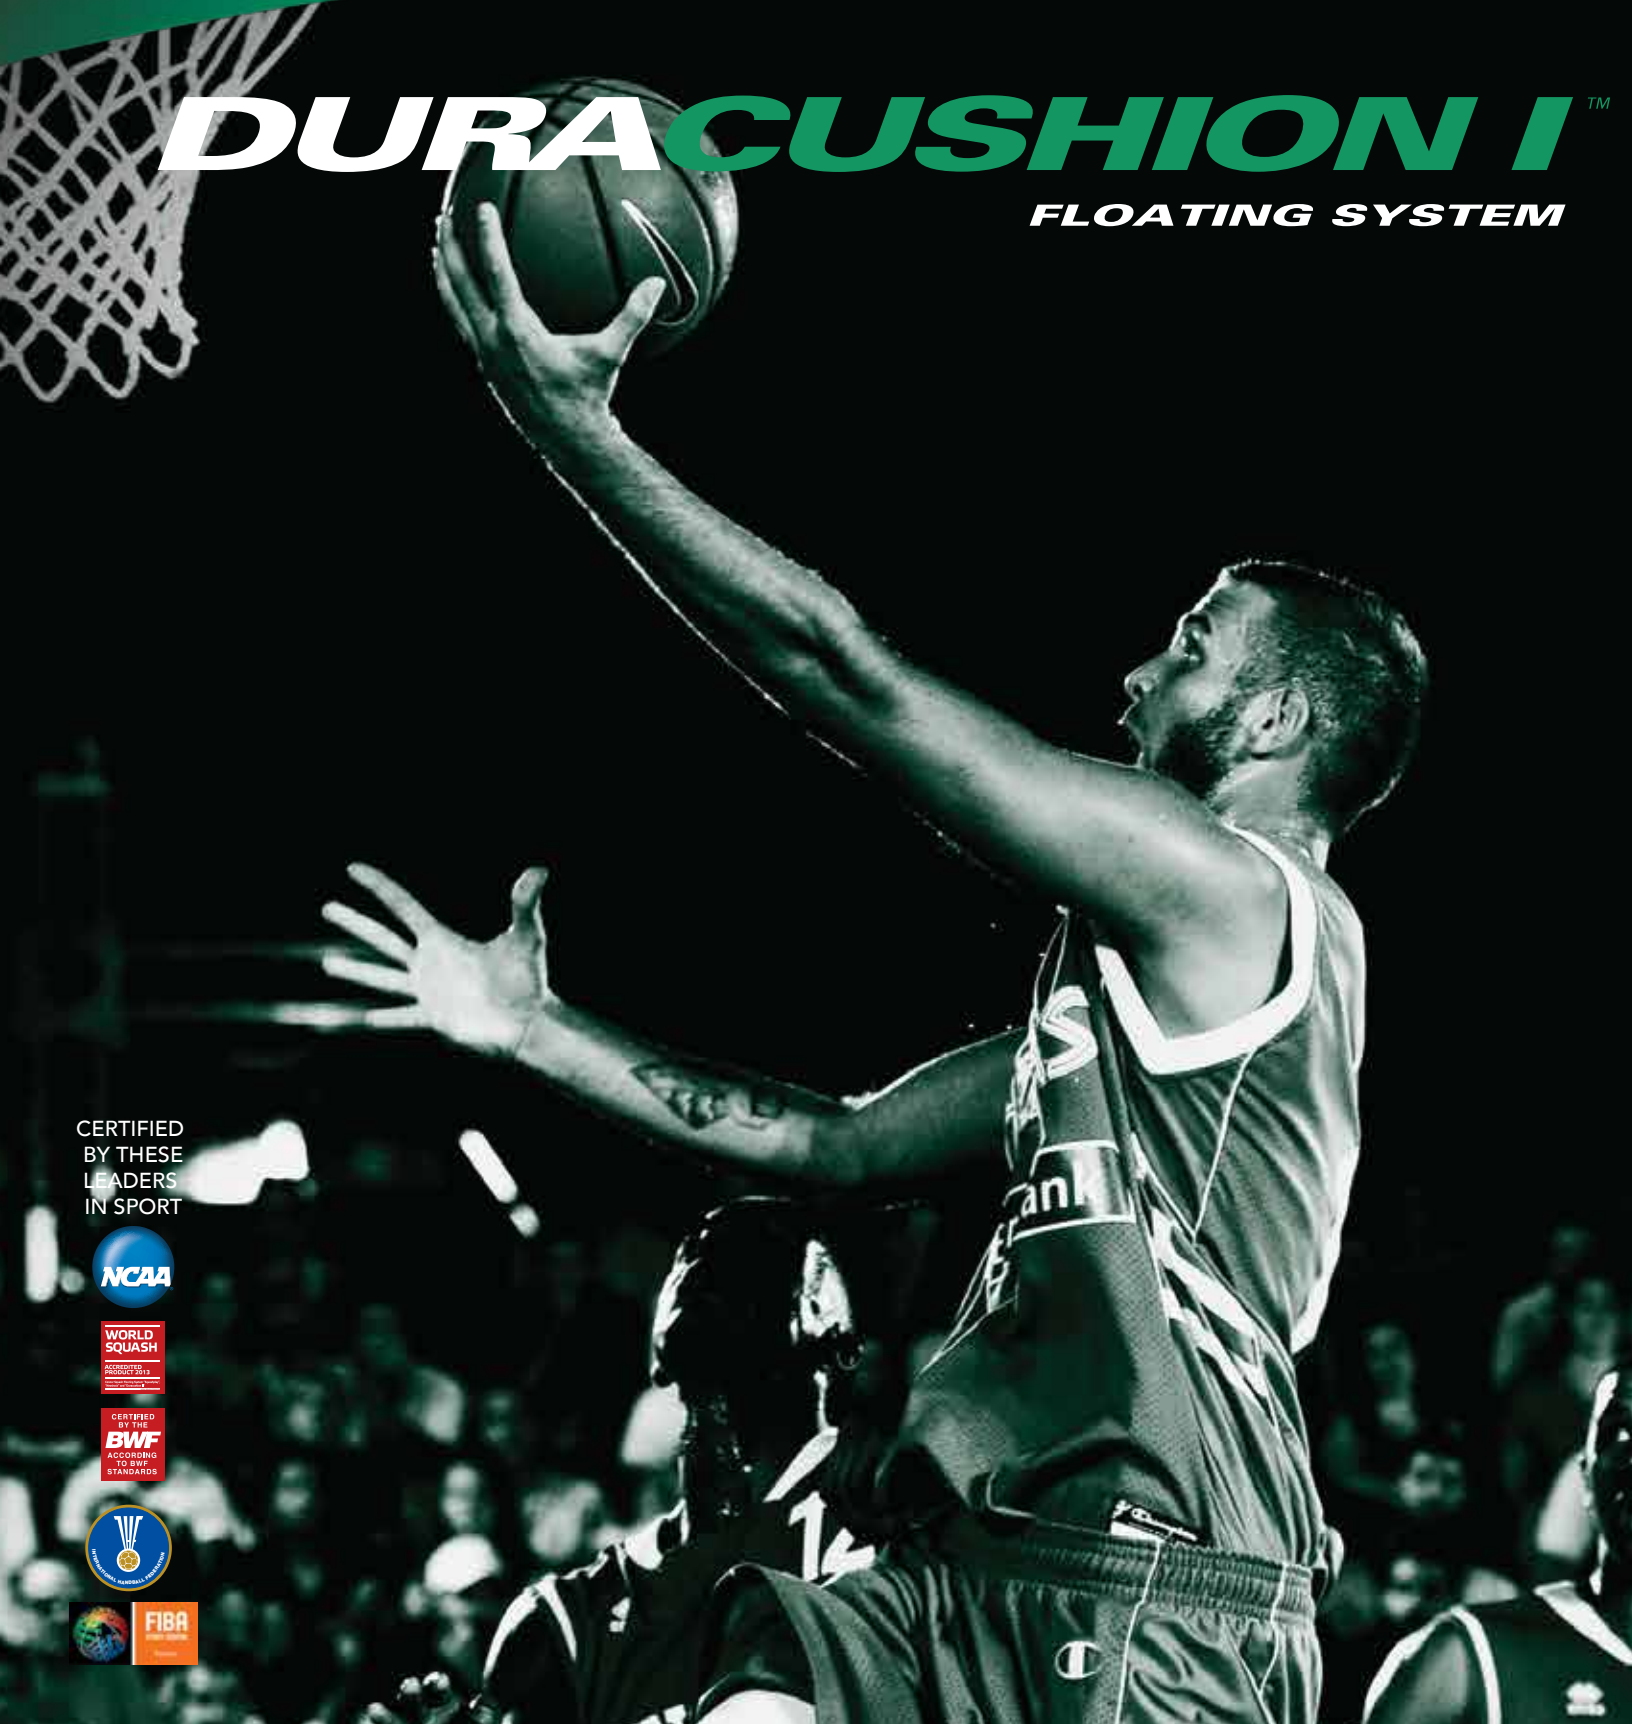

CERTIFIED BY THESE LEADERS IN SPORT



DURACUSHION I™

FLOATING SYSTEM

RFS, Inc. 375 Columbia Memorial Pkwy., Kemah, TX 77565

281.334.6800

info@teamrfs.com

TEAMRFS.COM



DuraCushion I includes standard PVC Duracushion pads below double layer plywood subfloor construction.

DURACUSHION I FLOATING SYSTEM



RESILIENCE

3/8" (10 mm) DuraCushion PVC Resilient Pads

FLOORING


MFMA Northern Hard Maple

SUBFLOOR CONSTRUCTION


Two Layers of 15/32" (12 mm) APA Rated Plywood Sheathing

Slab Depression: 3/8" (10 mm) pad: 25/32" (20 mm) flooring - 2 1/8" (54 mm) • 33/32" (26 mm) flooring - 2 3/8" (60 mm) • 5/8" (10 mm) pad: 25/32" (20 mm) flooring - 2 3/8" (60 mm) • 33/32" (26 mm) flooring - 2 5/8" (67 mm)


Wall Base Detail

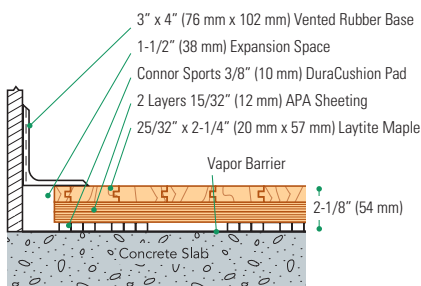

Threshold Detail (Optional Accessory)

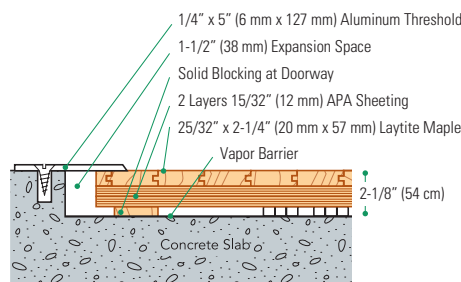

Equipment Detail (Optional Accessory)

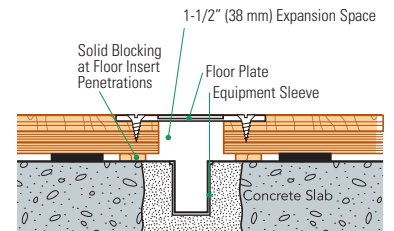

Manufacturing:
ISO 9001:2008
CERTIFIED
ISO 14001:2004
CERTIFIED



Testing Laboratory:
United States Sports
Surfacing Laboratory



Certified Testing:
ISSS Scientific
Body Membership



Green Status
Managed Forests,
Certification Available



Environmental Product Declaration
The First Sports Floor Manufacturer to Publish UL
Certified Product-Specific Environmental
Performance In Compliance with LEED V.4