

ADVANCE

MULTIPURPOSE GYMNASIUM SURFACE



RFS
sport flooring + lockers



A D V A N C E

M U L T I P U R P O S E G Y M N A S I U M S U R F A C E

PERFORMANCE LAYER

- Solid 2 mm rubber wear layer requiring no finishes or coatings
- Engineered to exceed coefficient of friction standards for athletic performance

LOAD DISBURSEMENT LAYER

- Provides reinforcement against bleachers, tables and chairs
- Generates proper force reduction giving the athlete proper foot support and stability
- New formulation provides superior resilience

COMFORT LAYER

- Deforming geometries improves product deflection, resulting in optimum shock absorption and energy return
- Vulcanized rubber will not compress or break down over time
- > 98% ball bounce

COMFORT AND SAFETY


- Class 1 fire & smoke density code rating (ASTM E648/E662)
- Antibacterial and antimicrobial throughout
- Outstanding sound absorption properties (IIC 48)
- Dual & triple durometer vulcanized construction - not factory or on-site lamination



Texture: Satin matte


Two Layers
New Generation - NG

I 15/64" (6 mm)
5/16" (8 mm)



Three Layers
Vulcanized

I 5/16" (8 mm)
3/8" (10 mm)




Roll length may vary depending upon thickness.

Custom colors available on order. Minimum quantity required. The degree and type of marbleization may vary from color to color.

PROJECTED LIFE-CYCLE COSTS

Price Listed in Current U.S. Market | per sq. ft. \$

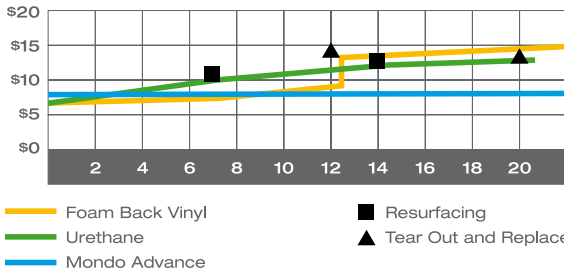


DURABILITY AND LIFE-CYCLE COST

- Non porous surface
- Outstanding static and rolling load characteristics
- Life expectancy >15 years
- Lowest total cost of ownership

GREEN FACTS

- 100% recyclable
- Free of phthalates, PVC, isocyanates and solvents
- Up to 20% post-consumer recycled content
- CA 1350 Compliant
- GREENGUARD Gold certified


EVERLAY T

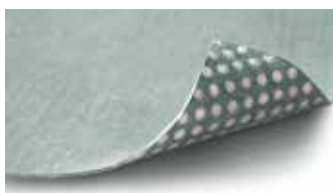

- Eliminates abatement cost
- Minimizes construction delays
- Increases thermal insulation
- Increases sound absorption

- Warranted up to 12 lbs. of moisture
- Allows for temporary installations which can be easily removed for use elsewhere
- Underlayment for moisture problems in renovation

I 0.05' (1.5 mm)



RFS, Inc.
375 Columbia Memorial Pkwy, Kemah, TX 77565
281.334.6800
info@teamrfs.com
www.teamrfs.com