

R A M F L E X


HIGH RESISTANT RUBBER FLOORING





R A M F L E X

HIGH RESISTANT RUBBER FLOORING

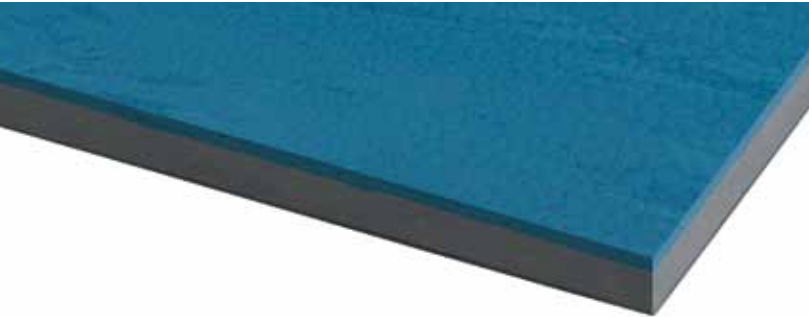

COMFORT AND SAFETY

- Fire resistance: compliant with EN 13501-1/EN 14041 standards
- Outstanding slip resistance
- Excellent resistance to heavy wear and tear

DURABILITY AND LIFE-CYCLE COST

- Engineered to withstand static loads such as heavy weights and cardio equipment
- Exceptional durability
- Easy maintenance: non-porous surface layer
- No welded seams

PERFORMANCE LAYER

- Solid homogeneous wear layer engineered to withstand heavy abuse from strength and conditioning equipment
- Excellent resistance to cutting or ripping

ANTI-BACTERIAL SURFACE

- Reduction of odors and hygiene issues
- Minimizes the chance of bacteria or mold growth



COLOR RANGE



920



741



715



712



707



710



986



790

Texture: Hammered

I 6 mm / 8 mm |
 1,86 x 6-12 m |
 91,4 x 91,4 cm |
 6 mm: 8,7 kg/m² / 8 mm: 12 kg/m²

The degree and type of marbling may vary from color to color.
790 (black) is a solid color, without marbling.

6 mm tiles stock available for: 712 (beige), 707 (grey), 710 (blue), 986 (marine blue).
Custom colors available on order. Minimum quantity required.



RFS, Inc. 375 Columbia Memorial Pkwy, Kemah, TX 77565
281.334.6800 info@teamrfs.com www.teamrfs.com