

IMPACT Pro Plush 1 1/4"





Nylon

Texturized Nylon

CT926

PROPERTY	DESCRIPTION
Primary/Stalk Yarn Polymer	Nylon
Secondary/Thatch Yarn Polymer	Nylon
Yarn Cross Section	Nylon; Textured Nylon
Standard Color	Forest/Olive
UV Stabilized	Yes
Fabric Construction	Tufted
Primary Backing	Dual Layered Woven Polypropylene
Coating Type	SilverBack Polyurethane
Perforations	Optional
Nylon Yarn Denier/Ends	6000/8
Texturized Nylon Denier/Ends (Thatch)	4400/8
Recommended Infill	2-3 lbs. Silica Sand
Pile Height	1 1/4"
Pile Weight	56 oz.

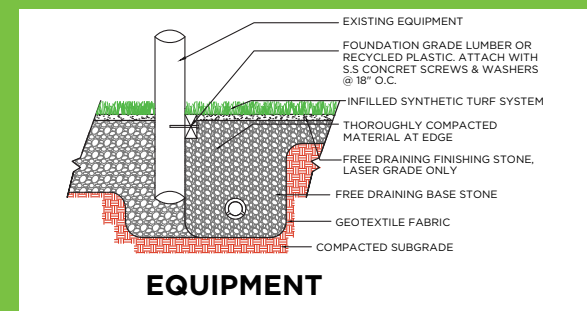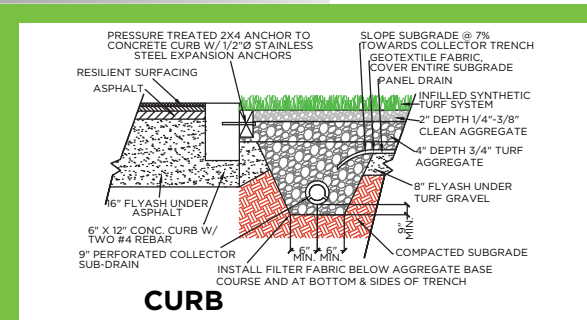

APPLICATION

This is an excellent landscape/multipurpose product that offers thatch, which provides added body, reducing the amount of infill needed. The four color blend of this surface provides a truly authentic look and feel that resembles a natural lawn. This product can be used for landscapes, playgrounds, pet areas, fringes, indoor arenas, training facilities and much more. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.



*Custom colors available upon request

TESTING

PL926

FINISHED FABRIC

ENGLISH SYSTEM

METRIC SYSTEM

ASTM TEST F-1551

<i>Nominal Specification</i>	<i>Value</i>	<i>Units</i>	<i>Value</i>	<i>Units</i>	<i>Method</i>
Pile Height (Nominal)	1.25	In.	31.75	mm.	D-5823
Face Weight	56	oz/yd ²	1,899	g/m ²	D-5848
Total Fabric Weight	83	oz/yd ²	2,814	g/m ²	D-5848
Primary Backing Weight	7.4	oz/yd ²	251	g/m ²	D-5848
Secondary Coating Weight	20	oz/yd ²	678	g/m ²	D-5848
Tuft Bind	>8	lbs.	>3.6	kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	kg.	D-2256
Lead Content	<50	ppm	<50	ppm	D-2765
Total Yarn Linear Density	10,400	Denier	11,554	D-Tex	D-1577
Stitch Rate	12	Per 3"	15.72	Per 10 cm	D-5793
Machine Gauge	1/4"	In.	.64	cm	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Water Permeability w/Infill	N/A	In/hr	>76	cm/hr	F-1551
Fabric Width	12	Ft.	3.6	M	None

11/12/2014